


4芯 EZTアンチベンディングインドア&インドア/アウトドアケーブル
4C EZT Anti-Bending Indoor & Indoor / Outdoor Cable

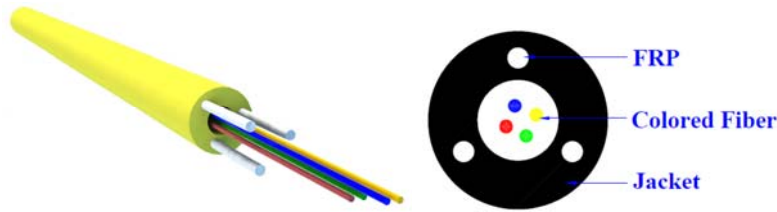

Cable Specification

Fiber Count	Strength Member	FRP Diameter, mm	Cable Outside Diameter, mm	Jacket Thickness, mm	Cable Nominal Weight, kg/km
4 Fibers	FRP	0.4 ± 0.05	3.0 ± 0.10	About 0.9	8.7
Flame Resistance	LSZH (IEC-60332-1-2)				
Max. Attenuation	@1310 nm		0.4 (dB/km)		
	@1550 nm		0.3 (dB/km)		
Cable Color	Black				
Macro bend Performance	Turns / Mandrel OD (mm)		ITU-T G657 A1		
Loss @ (1550/1625) nm	10 turns / 30mm		<(0.25/1.0) dB		
	1 turn / 20mm		<(0.75/1.5) dB		

Mechanical Properties

		Standard
Maximum Tensile Load-Loaded (N)	300 N	IEC 60794-1-2 E1
Maximum Tensile Load-Unloaded (N)	200 N	
Min. bend radius installed (mm)	10 x O.D.	IEC 60794-1-2 E11
Min. bend radius long term (mm)	5 x O.D.	
Maximum Crush Resistance	100 kg/100 mm	IEC 60794-1-2 E3
Storage Temperature	-20 to + 70 °C	IEC 60794-1-2 F1
Operating Temperature	-20 to + 70 °C	

These specifications are subject to change without prior notification.

* 特注ケーブルの製作も可能です。詳細は、お手数ですがお問い合わせフォームをお願いします。

Contact your OSTenp representative for information on specifications and availability.