


2芯フラット光ドロップケーブル
2C Flat Optical Drop Cable

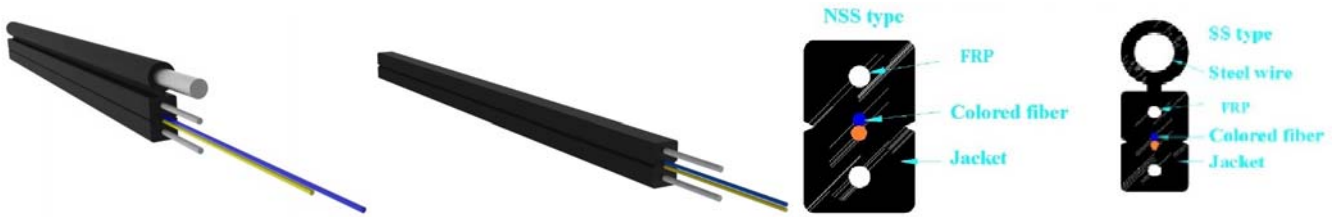

Cable Specification				
Type / Fiber Count	FRP Diameter ,mm	Steel Messenger Diameter , mm	Cable Outside Diameter, mm	Cable Nominal Weight, kg/km
NSS / 1,2 Fibers	0.4	NA	3.0 x 2.0 (±0.2)	10
SS / 1,2 Fibers	0.4	1.2	5.3 x 2.0 (±0.2)	20
Fiber Type	G652D	G657A1	50/125	OM3-10Gigabit-300M
Attenuation typical (nm)	1310/1550	1310/1550	850/1300	850/1300
Maximum Attenuation (dB/km)	0.4/0.35	0.4/0.35	3.5/1.5	3.5/1.5
Typical Attenuation (dB/km)	0.4/0.3	0.4/0.3	3.0/1.0	3.0/1.0
Minimum Bandwidth (MHz · km)	N/A	N/A	500/500	1500/500

* 特注ケーブルの製作も可能です。詳細は、お手数ですがお問い合わせフォームをお願いします。

Contact your OSTenp representative for information on specifications and availability.