


MPO/MTP LGXカセット
MPO/MTP LGX Cassette

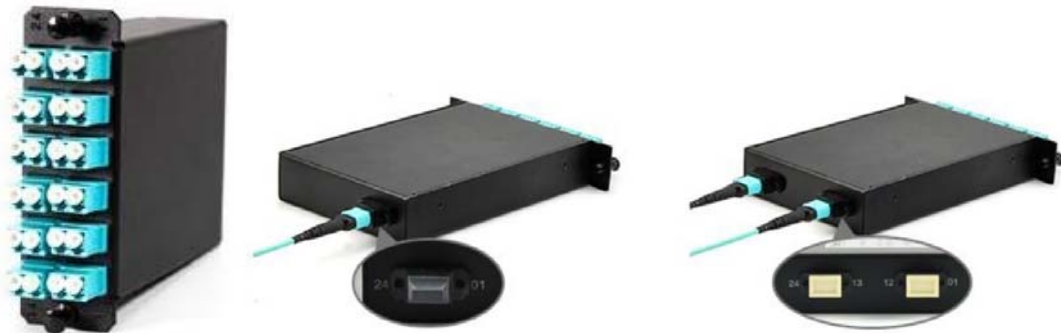

Performance Specifications

Parameters		Unit	
Operating Wavelength	1310,1550 or 850	nm	
Insertion Loss (Typical) MTP head	SM: 0.35; MM:0.35 Or SM: 0.70; MM:0.70	dB	
Insertion Loss (Typical) LC head	SM: 0.30; MM:0.30	dB	
Return Loss (Min.)	Single mode		
	PC	>40	dB
	APC	>50	dB
	APC	>40	dB
Multi mode	PC	>30	dB
Exchangeability	≤ 0.3 dB (Connect Randomly)		
Vibration	≤ 0.2 dB (5~50Hz, 1.5mm Amplitude)		
Temp. Range	≤ 0.2 dB (- 40 ~ 80 C, 55 Cycles)		
Operating Temperature	-10~75	° C	
Storage Temperature	-40~85	° C	

Ordering Information

LGX Cassette 1 MTP and 12 LC, OM3
 LGX Cassette 2 MTP and 12 LC, OS1
 LGX Cassette 2 MTP and 24 LC, OM3
 LGX Cassette 2 MTP and 24 LC, OS1

* 特殊仕様の対応も可能です。詳細は、お手数ですがお問い合わせフォームにお願いします。

Contact your OSTenp representative for information on specifications and availability.